



Modulight, Inc.

Document type:		Document number:	Version:	
Product specification		TBD	B1	
Document name:				
ML1210 SERIES TECHNICAL SPECIFICATION				
Author:	Reviewer:	Approver:	Release date:	Pages:
Sippe	Savpe	Uuspe	1-Sep-04	5

TECHNICAL SPECIFICATION ML1210

1 OVERVIEW

Modulight's 1310 nm DFB TO-can series are high-performance Distributed Feedback (DFB) laser diodes in 5.6 mm TO-cans. The lasers emit at 1310 nm wavelength. Laser diode emission wavelength is controlled by an internal grating. The can package includes high-quality InGaAs monitor photodiode for feedback loop.

1310 nm DFB TO-can series have been designed for digital optical communication networks with up to 4 Gb/s modulation speeds. Product is available with flat window cap or a specially designed low-profile aspheric lens cap for higher fiber coupling efficiency with only 4.05 mm height.

2 ORDERING INFORMATION

Product code	Cap type	Pin layout ¹⁾²⁾
ML1210	Aspherical lens	3
ML1211	Flat lens	3
ML1243	Aspherical lens	2
ML1244	Flat lens	1
ML1245	Flat lens	2
ML1246	Aspherical lens	1

3 ELECTRO-OPTICAL

CHARACTERISTICS¹

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Rated optical power ²	P_R	7	-	-	mW	0-85°C
Threshold current ³	I_{th}	-	15	25	mA	25°C
		-	25	45		85°C
Operating current	I_{op}	-	32	45	mA	25°C, $P_{op} = 5$ mW
		-	42	70		85°C, $P_{op} = 5$ mW
Operating voltage	V_{op}	-	1.15	1.4	V	0-85°C, $P_{op} = 5$ mW
Serial resistance ⁴	R_s	-	6	-	Ω	25°C, $P_{op} = 5$ mW
Slope efficiency ⁴	η	0.20	0.33	-	W/A	25°C, $P_{op} = 5$ mW
		-	0.28	-		85°C, $P_{op} = 5$ mW
Central wavelength	λ_c	1287	1310	1327	nm	25°C, $P_{op} = 5$ mW
		1280	-	1335		0-85°C, $P_{op} = 5$ mW
Spectral width ⁵	$\Delta\lambda$	-	0.07	0.2	nm	25°C, $P_{op} = 5$ mW
Side Mode Suppression Ratio ⁶	SMSR	30	43	-	dB	0-85°C, $P_{op} = 5$ mW
Temperature shift of wavelength	$\partial\lambda/\partial T$	-	0.09	.	nm/K	0-85°C, $P_{op} = 5$ mW
Perpendicular beam divergence angle (FWHM) ⁷	θ_{\perp}	-	35	-	deg	25°C, $P_{op} = 5$ mW
Parallel beam divergence angle (FWHM) ⁷	θ_{\parallel}	-	27	-	deg	25°C, $P_{op} = 5$ mW

¹ All temperatures refer to case temperature, T_c .

² Kink-free, demonstrated reliability

³ 2nd derivative method

⁴ $P_{LO} = 1$ mW, $P_{HI} = 7$ mW

⁵ RMS, -20 dB

⁶ -20 dB

⁷ Full Width at Half Maximum, applicable to flat window cap type only



Modulight, Inc.

Tel. +358 20 743 9000, Fax +358 20 743 9009

P.O.Box 770, FIN-33101 Tampere, FINLAND


www.modulight.com

Modulation bandwidth	f_{-3dB}	6	-	-	GHz	25°C, $I_{op} = I_{th} + 16$ mA
		4	-	-		85°C, $I_{op} = I_{th} + 16$ mA
Monitor current	I_m	50	200	1000	μ A	25°C, $P_{op} = 5$ mW
Monitor dark current	I_d	-	0.1	1.0	μ A	25°C, $V_{RPD} = 5$ V
Monitor capacitance	C_m	-	5	10	pF	$f = 1$ MHz, $V_{RPD} = 5$ V
Focal length ⁸	D_f	3.85	3.95	4.05	mm	25°C, $P_{op} = 5$ mW
Fiber coupling efficiency ⁸		-	40	-	%	25°C, $P_{op} = 5$ mW

4 ABSOLUTE MAXIMUM RATINGS⁹

Parameter	Symbol	Rating	Unit
Optical output power	P_{op}	20	mW
LD reverse voltage	V_{RLD}	2	V
LD forward current	I_{FLD}	200	mA
PD reverse voltage	V_{RPD}	20	V
PD forward current	I_{FPD}	10	mA
Lead soldering temperature (<10 s)	T_{SLD}	260	°C
Operating case temperature	T_c	0-85 °C	°C
Storage temperature	T_{STG}	-40-85 °C	°C

5 MECHANICAL SPECIFICATION – ML1211, ML1244, ML1245

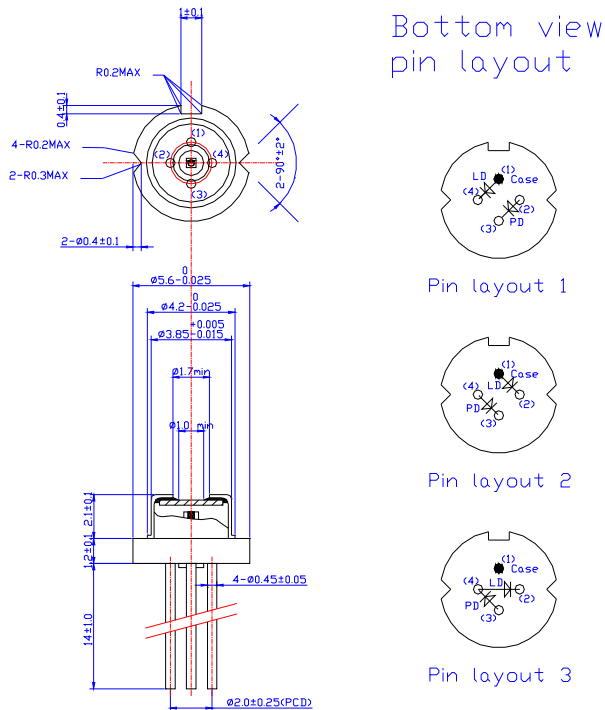

⁸ Distance from reference plane (see mechanical specification) to focal point. Applicable to aspheric lens cap type only.


⁹ Operation in excess of any one of these parameters may result in permanent damage.



Modulight, Inc.

Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com

6 MECHANICAL SPECIFICATION – ML1210, ML1243, ML1246

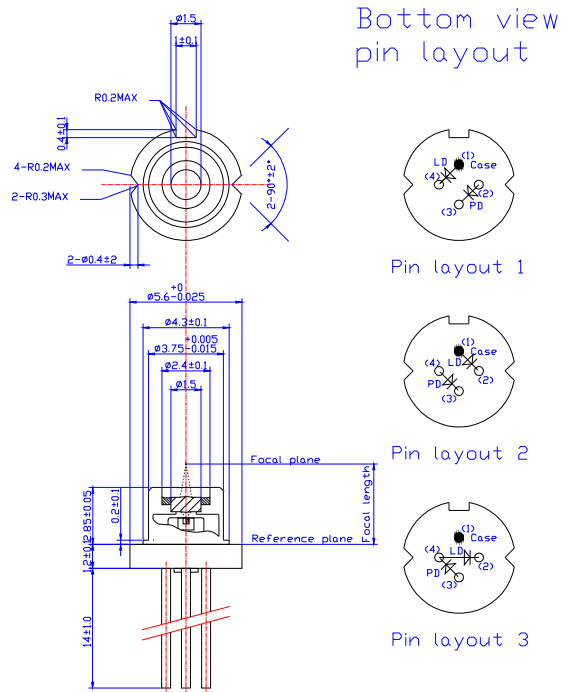

7 SAFETY INFORMATION

- The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid eye exposure to the beam, both direct and reflected.
- Products are subject to the risks normally associated with sensitive electronic devices including static discharge, transients, and overload. Please take care of proper ESD protection prior to handling the products.
- These Modulight products are not intended for use in systems where product malfunction can reasonably be expected to result in personal injury.



Peak power and wavelength are for safety analysis only do not present device performance



Modulight, Inc.

Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com

8 LIABILITY NOTE

- This document is sole property of Modulight, Inc. No part of this document may be copied without written acceptance of Modulight, Inc.
- All statements related to the products herein are believed to be reliable and accurate. However, the accuracy is not guaranteed and no responsibility is assumed for any inaccuracies or omissions. Modulight, Inc. reserves the right to make changes in the specifications at any time without prior notice.



Modulight

Modulight, Inc.

Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com