


# ML1941

1470 nm high-power laser chip for CW operation

## Overview

ML1941 is a high-performance multi-mode laser chip designed for applications requiring high-power free-space laser beams at 1470 nm. This product is an unmounted chip (bare die), which is suitable for CW operation, given that the mounting and packaging can handle the thermal load. Due to the inherent thermal sensitivity of this laser product, proper cooling must be ensured during operation.

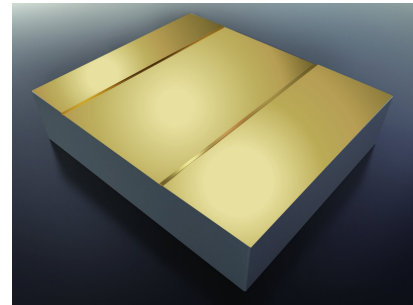

## Applications

Defense	Industrial	Medical
Eye-safe range-finding	Materials processing Optical pumping	Aesthetic treatments Low-intensity laser therapy

## Electro-optical Characteristics

Parameter	Symbol	Typical value	Unit
Peak Wavelength	$\lambda$	1470 $\pm$ 20	nm
Optical Output Power (peak power)	$P_{OPT}$	1.5	W
Operating Current	$I_{OP}$	4.2	A
Operating Voltage	$V_{OP}$	1.35	V
Slope Efficiency	$\eta$	0.38	W/A
Threshold Current	$I_{TH}$	0.22	A
Wavelength Temperature Coefficient	$\Delta\lambda/\Delta T$	0.6	nm/K
Spectral Width	$\delta\lambda$	10	nm
Parallel Beam Divergence (FWHM)	$\theta_{  }$	8	°
Perpendicular Beam Divergence (FWHM)	$\theta_{\perp}$	32	°

All above values are typical for a mounted laser under CW operation @ 20°C.

## Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
LD Reverse Voltage	$V_{RLD}$	2	V
LD Forward Current	$I_{FLD}$	4.4	A
Operating Temperature	$T_{OP}$	0...30 <sup>1</sup>	°C
Storage Temperature	$T_{STG}$	-40...85	°C

<sup>1</sup> A non-condensing environment should be ensured over the useful temperature range.

### Mechanical Specification

Parameter	Symbol	Value	Unit
Cavity Length	L	1000	μm
Chip Width	W	500	μm
Emitter Width	W <sub>e</sub>	100	μm
Chip Thickness	H	105	μm

### Safety Information

- The laser light emitted from this laser diode is invisible and harmful to the human eye. Avoid eye and skin exposure to the beam, both direct and reflected.
- Products are subject to the risks normally associated with sensitive electronic devices including static discharge, transients, and overload. Please ensure ESD protection prior to handling the products.
- These Modulight products are not intended for use in systems where product malfunction can reasonably be expected to result in personal injury.



Peak power and wavelength are for safety analysis only, not to present device performance.

### Liability note

This document is sole property of Modulight, Inc. No part of this document may be copied without written acceptance of Modulight, Inc. All statements related to the products herein are believed to be reliable and accurate. However, the accuracy is not guaranteed and no responsibility is assumed for any inaccuracies or omissions. Modulight, Inc. reserves the right to make changes in the specifications at any time without prior notice.