



Modulight, Inc.

Document type:		Document number:	Version:	
		TBD	1.0	
Document name:				
TECHNICAL SPECIFICATION ML1468				
Author:	Reviewer:	Approver:	Release date:	Pages:
rusma	Torka, Vilvi		1-Nov-2007	5

TECHNICAL SPECIFICATION ML1468

1 OVERVIEW

Modulight ML1468 is a high-performance multi-mode 635 nm laser designed for medical and instrumentation applications. The laser is housed in a 9-mm TO-can (SOT-148), covered by a flat window in standard versions. Custom beam-shaping optics is available on demand. This laser device is suitable for operation in both pulsed and CW modes. The size of the emitting area of the laser die is 50 μm x 1 μm .

2 ELECRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Threshold Current	I_{th}	160	mA
Output Power	P_{opt}	220	mW
Operating Current	I_{op}	400	mA
Operating Voltage	V_{op}	< 2.3	V
Slope Efficiency	η	0.92	W/A
Peak Wavelength	λ	635	nm
Center Wavelength tolerance	$\Delta\lambda$	± 5	nm
Parallel Beam Divergence	$\theta_{ }$	5	degrees
Perpendicular Beam Divergence	θ_{\perp}	40	degrees

All above values are typical for CW operation at 15°C.


3 ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit
LD reverse voltage	V_{RLD}	2	V
LD forward current	I_{FLD}	500	mA
Lead soldering temperature (<10 s)	T_{SLD}	260	°C
Operating case temperature	T_c	0–50°C	°C
Storage temperature	T_{STG}	-40–85°C	°C




Modulight, Inc.
Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com

4 MECHANICAL SPECIFICATION

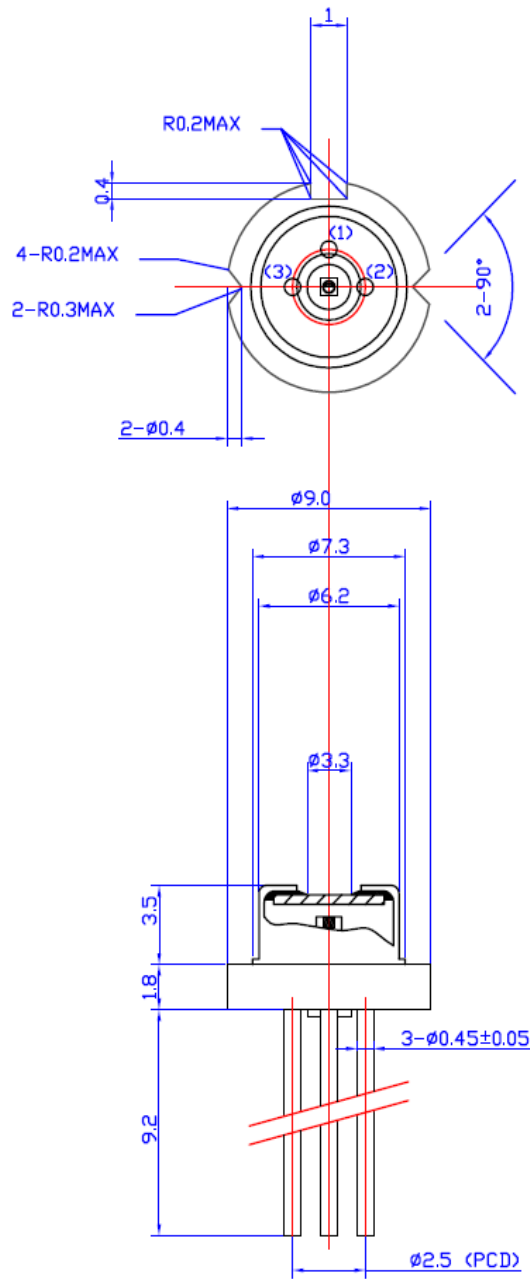


Bottom view
pin layout



Modulight

Modulight, Inc.
Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com

5 TYPICAL PERFORMANCE

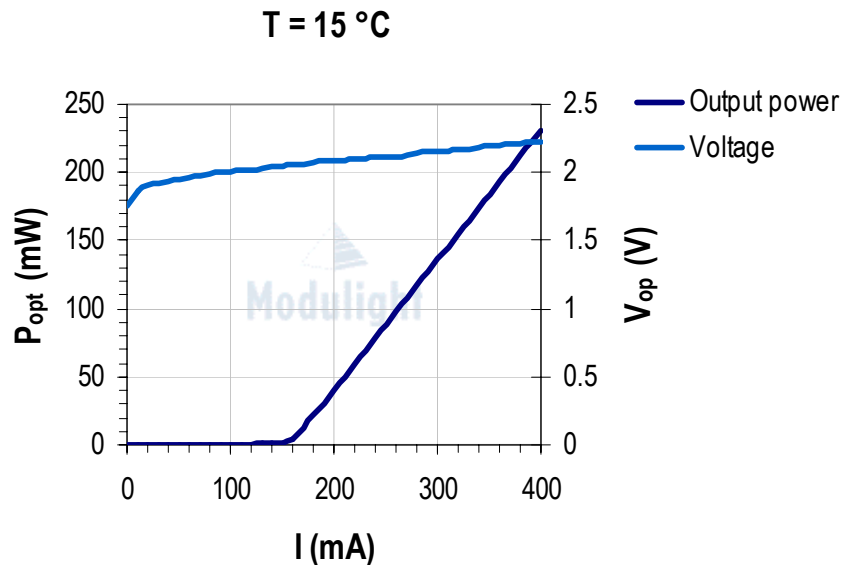

6 SAFETY INFORMATION

- The laser light emitted from this laser diode, although visible, may be harmful to the human eye. Avoid eye exposure to the beam, both direct and reflected.
- Products are subject to the risks normally associated with sensitive electronic devices including static discharge, transients, and overload. Please take care of proper ESD protection prior to handling the products.
- These Modulight products are not intended for use in systems where product malfunction can reasonably be expected to result in personal injury.



Modulight, Inc.
Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com

7 LIABILITY NOTE

- This document is sole property of Modulight, Inc. No part of this document may be copied without the written acceptance of Modulight, Inc.
- All statements related to the products herein are believed to be reliable and accurate. However, the accuracy is not guaranteed and no responsibility is assumed for any inaccuracies or omissions. Modulight, Inc. reserves the right to make changes in the specifications at any time without prior notice.



Modulight, Inc.
Tel. +358 20 743 9000, Fax +358 20 743 9009
P.O.Box 770, FIN-33101 Tampere, FINLAND
www.modulight.com