


795 nm 30% fill factor laser bar for CW operation

ML1278



OVERVIEW

ML1278 is an unmounted laser bar (laser array) with 30% fill factor. This laser bar is designed for continuous wave (CW) operation, with high power conversion efficiency. The output power level is 40 W at 795 nm. The 8xx nm range laser bars are also available with different wavelength criteria and tolerance, per customer request, between wavelengths 785...810 nm. Please contact the sales team for additional info.

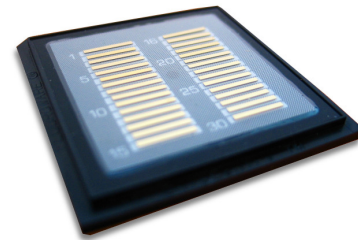

APPLICATIONS

Pumping Industrial
Space / Defence Medical

ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Typical value	Unit
Threshold Current	I_{TH}	< 9	A
Optical Output Power	P_{OPT}	40	W
Operating Current	I_{OP}	45	A
Operating Voltage	V_{OP}	< 2.0	V
Slope Efficiency	η	> 1.0	W/A
Peak Wavelength	λ	795 ± 3	nm
Wavelength Temperature Coefficient	$\Delta\lambda/\Delta T$	0.3	nm/K
Spectral Width	$\delta\lambda$	4	nm
Parallel Beam Divergence (FWHM)	$\theta_{ }$	5...10	°
Perpendicular Beam Divergence (FWHM)	θ_{\perp}	30...35	°
Polarization		TM	

All above values are typical for CW operation @ 20°C.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit
LD forward current	I_{FLD}	65	A
Operating temperature range	T_{OP}	-10...+40 ¹	°C
Storage temperature range	T_{OP}	-40...+85	°C

¹A non-condensing environment is required for operation temperatures below 10 °C

795 nm 30% fill factor laser bar for CW operation


ML1278



MECHANICAL SPECIFICATIONS

Parameter	Symbol	Value	Unit
Cavity Length	L	1000	μm
Bar Width	W	10	mm
Emitter Pitch	P_e	500	μm
Emitter Width	W_e	150	μm
Fill Factor	FF	30	%
Bar Thickness	H	130	μm
Emitters in a Bar		19	

BAR LAYOUT

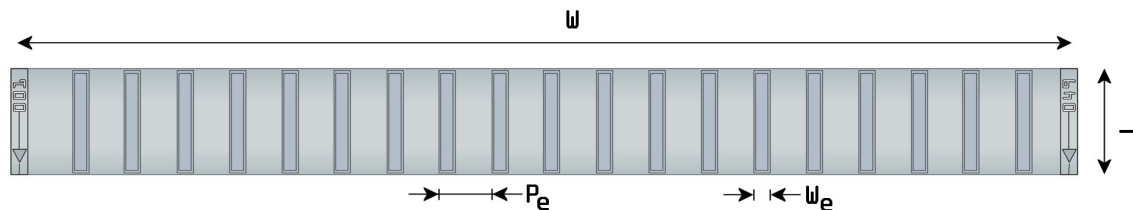

SAFETY INFORMATION

- The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid eye exposure to the beam, both direct and reflected.
- Products are subject to the risks normally associated with sensitive electronic devices including static discharge, transients, and overload. Please ensure ESD protection prior to handling the products.
- These Modulight products are not intended for use in systems where product malfunction can reasonably be expected to result in personal injury.



LIABILITY NOTE

- This document is sole property of Modulight, Inc. No part of this document may be copied without written acceptance of Modulight, Inc.
- All statements related to the products herein are believed to be reliable and accurate. However, the accuracy is not guaranteed and no responsibility is assumed for any inaccuracies or omissions. Modulight, Inc. reserves the right to make changes in the specifications at any time without prior notice.